



**ABOVE-GROUND  
AUTOMATIC SLATTED COVER**

**MOON**



**A modern and customisable design**



# ABOVE-GROUND AUTOMATIC SLATTED COVER MOON

## + AESTHETIC

- Elegant and modern end-stands imagined by our own designers.
- Discretion assured with end-stands hiding the cover while the slat is rolled.


## + FINISHES

- All materials and components have been carefully selected for a perfect stability and an optimal rendering.
- The composite thermoplastic end-stand allows an easier maintenance and a excellent resistance to impacts and scratches.



## + CUSTOMISABLE

- Available in electric or solar version.
- Different choice of colours for a perfect integration in your environment.
- Possibility to customise your central disk colour to add a modern touch.

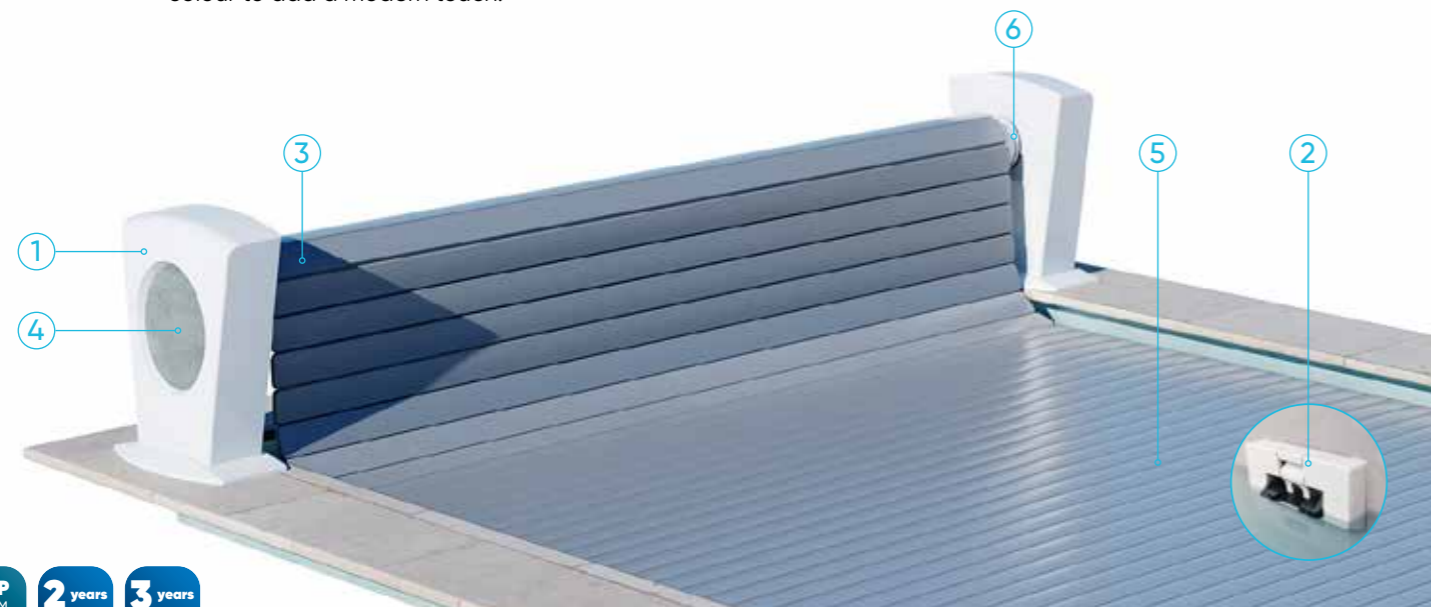

Cover available for pool from 2.00 x 3.00 m and up to 5.00 x 13.50 m.

### 1 END-STANDS

- Composite and thermoplastic structure.
- Excellent resistance to impacts and scratches.
- Aluminium frames.
- Other end-stand colours on request (option).

### 2 LOCKING KITS

### 3 MOTORISATION

#### Tubular electric motor:

- Adjustable mechanical ends-of-runs, free-wheeling motor (used to unroll the slats in case of a motor breakdown and to keep the pool safe despite the absence of electricity).
- The lifetime of the motor is longer thanks to the bearings which support the tube and therefore the weight of the cover.

Controlled by Wi-Key, key switch or LivePool.

### 4 CENTRAL DISK

- 7 disk colours are available or specify your RAL as an option.

### 5 SLATS

- Opaque PVC 84 slats, solar polycarbonate slats or opaque PVC 69 slats.

### 6 ALUMINIUM TUBE



## Your slats choice

All our slats have a quality finish and are compliant with the NF P90-308 standard.


### Opaque PVC 84 slats



### Opaque PVC 69 slats



### Solar polycarbonate slats



## Why cover your pool?

- Reduce water consumption by limiting evaporation.
- Reduces energy consumption.
  - Makes cleaning easier & reduced consumption of chemical products.

**USEFUL TO KNOW**  
Choose solar polycarbonate slats to heat your pool water.



**Read carefully and keep for the future reference.**

The Moon automatic slatted cover is a swimming pool safety cover designed to prevent children under 5 years of age from accessing the pool. This product complies with the NF P90-308 standard. It is no substitute for common sense or individual responsibility. It is not intended either to be a substitute for parental and/or adult supervision, which is the essential factor for the protection of young children. A child can get drowned within less than 3 minutes ; no type of protection will ever replace the vigilance and supervision of responsible adults.

**Warranty:** 2 years for the reel system and 3 years for the motor. 3 years for opaque PVC slats and 5 years for solar polycarbonate slats, in accordance with our general sales terms.

**Order form:** to have a cover correctly adjusted to the pool, it is essential to provide a drawing of the pool with measurements taken every 1 meter. In accordance with the standard NF P90-308, the gap between the inside of the pool and the edge of the cover must be less than 70 mm.

**Operating time:** for a pool of 5.00 x 10.00 m: 3 minutes for the automatic opening or closing and 30 seconds for the locking or unlocking of the safety kits. One person only can do the opening and closing of the Moon.

**Use:** for all seasons. For a proper functioning, maintain a constant water level corresponding to a normal filtration of the pool. It is essential to have a water level regulator. The water level have to comply with the technical notice.

**Use limits:** DEL automatic slatted covers used on overflow pools can comply with the French Safety Standard only if the pool is equipped with a device such as the Infinity control box that automatically lowers the water level by at least 2 cm when the automatic slatted cover is closed on the pool. the installation of a DEL automatic slatted cover on overflow pools and/or with a stair along the length (detachable side stair) does not comply with the standard NF P90-308. Unless otherwise specified by the manufacturer, under water alarms are not compatible with DEL covers.

**Wintering:** the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering net to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

**Packing list:** for a swimming pool measuring 5.00 x 10.00 m. Slats: 5 packages: 5.10 x 0.25 x 0.20 m - 250 kg / Tube: 1 package: 5.46 x 0.20 x 0.20 m - 30 kg / End-stands: 1 pallet: 0.80 x 0.60 x 0.55 m - 40 kg / Total weight: 350 kg.

**Manufacturer:** DEL SAS - ZA La Croix Rouge - 35530 Brécé - FRANCE  
[www.del-piscine.fr/en](http://www.del-piscine.fr/en)

**LIVEPOOL**

Opening & closing of the automatic cover

with a smartphone thanks to the free LivePool App.

**DON'T FORGET**

Protect your slats from UVs and dirt

with the Ivernea winter shift or the Ivernea Plus 4-season protective shift.

**FOR MORE INFORMATION, PLEASE ASK YOUR POOL EXPERT**

DEL SAS with a capital of 2 300 000 € - RCS 30335571 Rennes - ZA La Croix Rouge - 35530 Brécé - FRANCE • Non-binding document • © DEL SAS, Cedric Stoecklin, Maud Faussurier • 05/24 • Do not throw away • A-DBRO12202.L1



a brand by

