

**IN-GROUND AUTOMATIC SLATTED COVER**  
**ROLLENERGY EVOLUTION**



**The ideal in-ground automatic cover for pool renovations**



# IN-GROUND AUTOMATIC SLATTED COVER ROLLENERGY EVOLUTION

## + ADAPTABLE


- Suitable for all types of pools under construction or renovation without altering the pool structure.

## + DISCREET

- The in-ground slatted cover is in a pit covered by a decking above the waterline. The motor is housed inside the roller tube.
- The colours of the cover parts can be matched together for perfect integration (beam, beam's supports, decking, slats, locking kits, separating wall).

## + DEL KNOW-HOW

- The Rollenergy Evolution automatic slatted cover has been manufactured in our workshops since 2007.

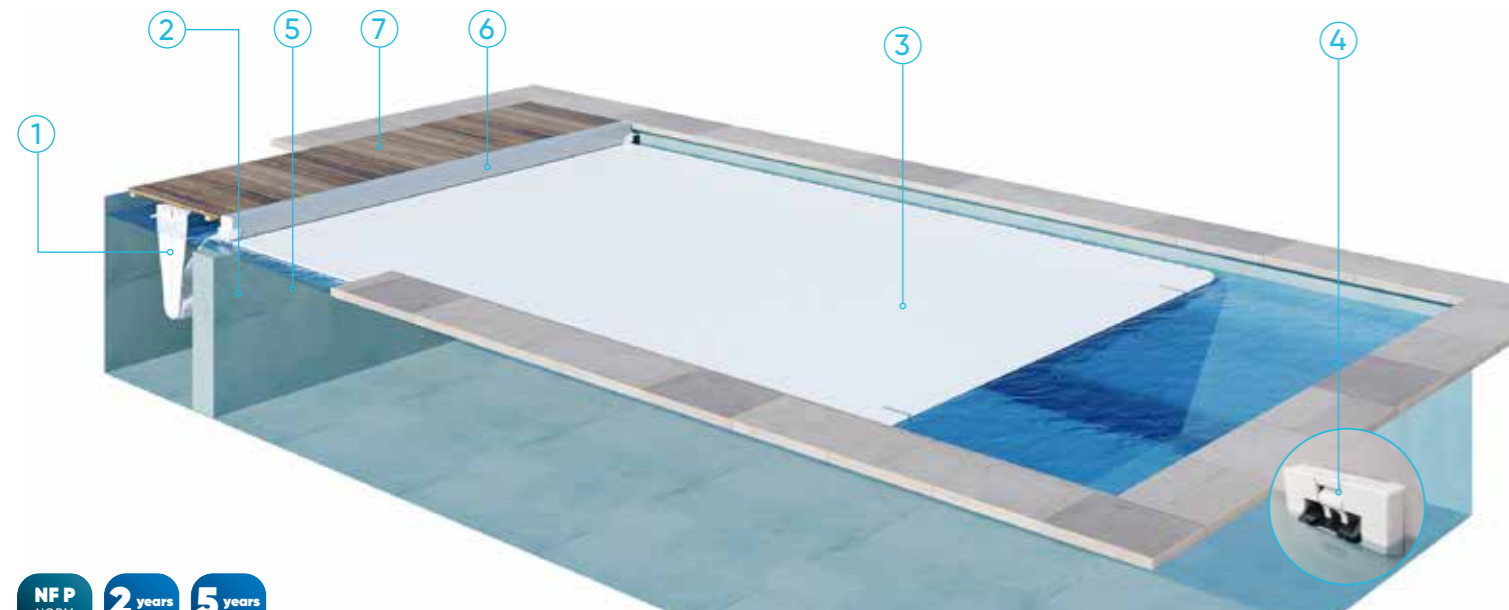

Cover available for pools from 2.00 x 3.00 m and up to 8.00 x 15.50 m.

- 1 SIDE SUPPORT**  
• White composite.

- 2 MOTORISATION**  
• "Stop salt" control.  
• Automatic switch.  
Controlled by Wi-Key, key switch or LivePool.

- 3 SLATS**  
• Opaque 84 PVC slats, solar polycarbonate slats or opaque 69 PVC slats.

- 4 LOCKING KITS**

- 5 ALUMINIUM TUBE**

- 6 ANODISED ALUMINIUM BEAM**

- 7 TEAK DECKING OR ALUMINIUM DECKING**

- 8 STOP FLOW**  
• Control of the filtration of the cover. It allows to stop the filter pump when the automatic cover motor is working.


## Your slats choice

All our slats have a quality finish and are compliant with the NF P90-308 standard.


### Opaque PVC 84 slats



### Opaque PVC 69 slats



### Solar polycarbonate slats



## Why cover your pool?

- Reduce water consumption by limiting evaporation.
- Reduces energy consumption.
  - Makes cleaning easier & reduced consumption of chemical products.

**USEFUL TO KNOW**  
Choose solar polycarbonate slats to heat your pool water.



#### Read carefully and keep for future reference.

Rollenergy Evolution is a safety slatted cover for swimming pools, designed to keep children under the age of 5 out of the pool. This product is compliant with NF P90-308 standard if installed with the recommended safety locking kits. It is not a substitute for common sense or personal responsibility. It is no substitute for the vigilance of parents and/or responsible adults, which remains the essential factor for the safety of young children. A child can drown in less than 3 minutes; no type of preventive measures can replace the monitoring and vigilance of a responsible adult.

**Warranty:** 5 years for the tubular motor. 3 years' warranty on opaque PVC 84 slats and opaque PVC 69 slats and 5 years' warranty on the solar polycarbonate slats. The roller is warranted for 2 years, in accordance with our general terms of sale.

**Order form:** for the cover to be properly adjusted to the swimming pool, it is essential to provide a drawing of the pool measured metre by metre. As specified by standard NF P90-308, the gap between the inner side of the pool and the edge of the cover must be less than 70 mm.

**Time needed to operate a pool measuring 5.00 x 10.00 m:** 3 minutes to automatic opening or closing and 30 seconds for locking or unlocking the locking kits. The Rollenergy Evolution can be opened or closed by one person.

**Use:** all year round. To keep your cover in good working conditions, maintain a constant water level that matches the normal filtration rate of the swimming pool. The use of a water level regulator is essential. It must comply with the instruction manual.

**Use limits:** DEL automatic slatted covers used on overflow pools can comply with the French Safety Standard only if the pool is equipped with a device such as the Infinity control box that automatically lowers the water level by at least 2 cm when the automatic slatted cover is closed on the pool. The installation of a DEL automatic slatted cover on overflow pools and/or pools with steps on the length side (removable steps on the side) is not compliant with the NF P90-308 standard. In this case other compliant systems should be used. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with automatic slatted covers.

**Wintering:** the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering net to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

**Packing list:** for a swimming pool measuring 5,00 x 10,00 m. 84 PVC opaque slats: 4 packages: 5.10 x 0.39 x 0.11 m - 190 kg. / Solar polycarbonate slats and 69 PVC opaque slats: 5 packages: 5.10 x 0.25 x 0.20 m - 250 kg / Tube: 1 package: 5.10 x 0.15 x 0.15 m - 40 kg / Beam: 1 package: 5.10 x 0.15 x 0.15 m - 34 kg / Decking: 1 pallet: 1.20 x 1.00 x 0.50 m - 100 kg / Motorisation kit: 1 package: 0.60 x 0.35 x 0.35 m - 20 kg / Beam support: 1 package: 0.30 x 0.20 x 0.20 m - 10 kg / Locking kits: 1 package: 0.30 x 0.20 x 0.20 m - 5 kg / Total weight: 400-410 kg.

**Manufacturer:** DEL SAS - ZA La Croix Rouge - 35530 Brécé - FRANCE  
[www.del-piscine.fr/en](http://www.del-piscine.fr/en)

#### LIVEPOOL

Opening & closing of the automatic cover with a smartphone thanks to the free LivePool App.

#### DON'T FORGET

Protect your slats from UVs and dirt with the Ivernea winter shift or the Ivernea Plus 4-season protective shift.

FOR MORE INFORMATION, PLEASE ASK YOUR POOL EXPERT

DEL SAS with a capital of 2 300 000 € - RCS 303355671 Rennes - ZA La Croix Rouge - 35530 Brécé - FRANCE • Non-binding document • © DEL SAS, Nicolas Kosica, Pascal Avenet • 05/24 • Do not throw away • A-DBROI2100LI



a brand by

