

## SLATS

# OPAQUE PVC 84 SLATS



The patented cover slat with a unique design



## SLATS


# OPAQUE PVC 84 SLATS

### + OUTSTANDING DESIGN

- A patented design unique on the market.
- Flat and smooth slat for impeccable and perfect look on the water.
- The matt black caps contrast elegantly with the colour of the slats.
- The boat deck-like flexible joints make cleaning between the slats easy.
- Optimum watertightness thanks to the welded caps.

### + OPTIMIZED MATERIALS

- Increased health protection thanks to the absence of lead compounds.
- Long-lasting against stains, organic deposits and UV rays.
- Resistance to ageing in accordance with standard requirements NF T 54 405-1: 2013.

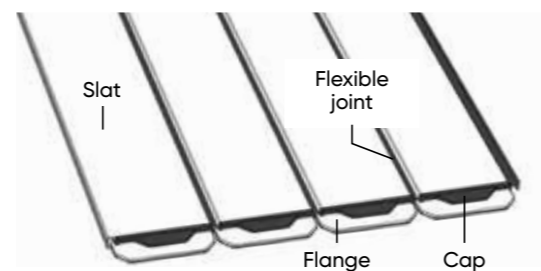

## A choice of 2 colours

All our slats are compliant with the NF P90-308\* standard.



Grey



White



Flexible joints and caps are black.  
The colour of the flanges match the colour of the slats.

\* To comply with the French safety standard NF P90-308, the slats must have a minimum width of 2.50 m.

## USEFUL TO KNOW

The opaque PVC 84 slats are available for:

- All automatic slatted covers (in-ground, above-ground and mobile).
- Pools up to 5.00 m wide.
- Pool with step units.
- Pools with overflow or mirror.
- DEL Pushlock & Pushlock Automatic locking systems.

## Why cover your pool?

- To reduce the water consumption by limiting evaporation.
- To reduce energy consumption to filter, treat and heat the water.
- To make cleaning easier and reduce the use of chemical products.

## Your safety locking kit Pushlock

Aesthetic and discreet, the strap is clipped into the Pushlocks located on the width(s) of the pool, ensuring its safety.



White



Beige



Blue



Light grey



Dark grey



Argile green

## ▶ DON'T FORGET

Protect your slats further from UVs & dirt with the Ivernea winter shift or the Ivernea Plus 4-season protective shift.





#### Read carefully and keep for future reference.

The slats are parts of the slatted cover designed to prevent children under 5 years of age from accessing the pool. This product complies with the French safety NF P90-308 standard. It is no substitute for common sense or individual responsibility. It is not intended either to be a substitute for parental and/or adult supervision, which is the essential factor for the protection of young children. A child can get drowned within less than 3 minutes; no type of protection will ever replace the vigilance and supervision of responsible adults.

**Warranty:** 3 year for opaque PVC 84 slats in accordance with our general sales terms.

**Order form:** to have slats correctly adjusted to the pool, it is essential to provide a drawing of the pool with measurements taken every 1 meter. In accordance with the French safety NF P90-308 standard, the gap between the inside of the pool and the edge of the cover must be less than 70 mm.

**Time needed to close a pool measuring 5.00 x 10.00 m:** 3 minutes for automatic opening or closing and 30 seconds for locking or unlocking the safety kits. Slats can be opened or closed by one person.

**Use:** for all seasons. For a proper functioning, maintain a constant water level corresponding to a normal filtration of the pool. It is essential to have a water level regulator. The water level has to comply with the technical notice.

**Use limits:** DEL automatic slatted covers on overflowing pools can only be compliant if the pool is fitted with a device such as the Infinity control box that automatically lowers the water level by at least 2 cm when the cover is closed on the pool. To date, DEL automatic slatted covers with a removable form on a side staircase do not comply with French standard NF P90-308. Unless otherwise specified by the manufacturer, immersion alarms are not compatible with DEL automatic slatted covers.

**Wintering:** the swimming pool must be wintered on the basis of its geographical location. Without lowering the water level, close the cover to its safety position and where applicable install a wintering shift to protect the cover. If the water level is lowered so that the wall units are above the waterline, roll the cover in and secure the pool using a winter safety cover.

**Packing list:** for a swimming pool measuring 5.00 x 10.00 m. Slats: 4 packages: 5.10 x 0.39 x 0.11 m - 190 kg.

**Manufacturer:** DEL SAS - ZA La Croix Rouge - 35530 Brécé - FRANCE

▶ VISIT OUR WEBSITE [WWW.DEL-PISCINE.FR/EN](http://WWW.DEL-PISCINE.FR/EN)

FOR MORE INFORMATION, PLEASE ASK YOUR POOL EXPERT

DEL SAS with a capital of 2 300 000 € - RCS 303355671 Rennes - ZA La Croix Rouge - 35530 Brécé - FRANCE • Printed by Calligraphy Print - 35220 Châteaubourg - FRANCE • Non-binding document • © DEL SAS • 01/25 • Do not throw away • A-DBR012001LI

